



DON'T LET HARD WATER MAKE YOU STEAMING MAD!


The Antunes Point-of-Use (POU) Water Softener Systems is an excellent solution to protect your equipment from scale.

The vast majority of the country has hard water, and that hardness and associated scale deposits can be a serious problem for cooking appliances. An Antunes Water Softener can reduce these problems, making sure that your equipment stays free of scale. Ideal for use with low volume soft water applications, the POU water softener is a compact and convenient solution.



Scale Reduction

Water softeners reduce total water hardness which reduces the potential for scale formation.



Discreet Design Option


Enclose your softener in a stainless steel housing for front of house use.



Reliability

Antunes softeners are designed for long life.

Commercial Point-of-Use Water Softener | WSS

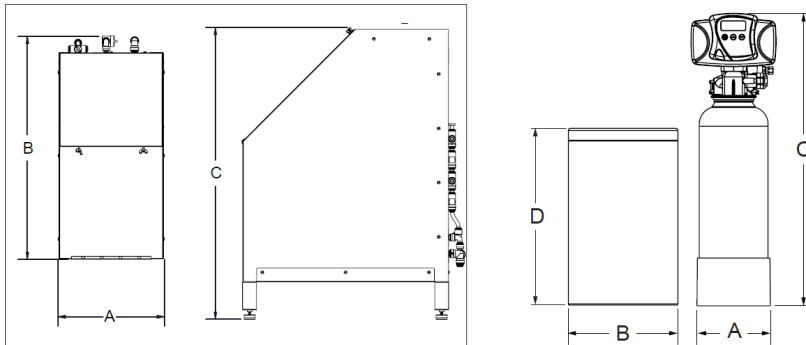

Features:

- Prevents scale buildup on equipment
- Lowers total hardness below 1 grain per gallon
- Has an option for a covered enclosure for front of house use

Commercial Point-of-Use Softener System Information

Model & Part No.	Max Flow Rate	Pressure Drop at Rated Flow Rate	Drain Flow Rate	Softener Width (A)	Softener Height (C)	Softener Depth	Softener System Operating Weight	Softener Tank Size	Brine Tank Depth (B)	Brine Tank Height (D)	Brine Tank Operating Weight
WSS-0618-ENC 9710134	2.9 gpm (11 lpm)	15 PSI	1 gpm (3.8 lpm)	11.4" (290 mm)	31.3" (795 mm)	24" (610 mm)	120 lbs (54 kg)	6"x18" (154 x 457 mm)	10" (254 mm)	16" (406 mm)	N/A
WSS-0618 9710145	2.9 gpm (11 lpm)	15 PSI	1 gpm (3.8 lpm)	6" (152 mm)	27" (686 mm)	N/A	50 lbs (23 kg)	6"x18" (154 x 457 mm)	10" (254 mm)	16" (406 mm)	50 lbs (23 kg)

Model & Part No.	Resin Volume (Cubic Feet)	Rated Capacity (Gains @ lbs of Salt)	Rated Efficiency (Gains @ lbs of Salt)	Volts	Hertz	Watts	Amps	Operating Pressure (PSI)	Operating Temperature	Inlet	Outlet	Drain
WSS-0618-ENC 9710134	0.2	2,667 @ 4.0 5,400 @ 9.0 6,200 @ 15.0	4,490 @ 4.0	120	50/60	40 VA	0.33	20-125	34-110°F (1.1-43.3°C)	3/8" (9.53 mm) OD Tubing	3/8" (9.53 mm) OD Tubing	1/2" (12.7 mm) OD Tubing
WSS-0618 9710145	0.2	2,667 @ 4.0 5,400 @ 9.0 6,200 @ 15.0	4,490 @ 8.0	120	50/60	40 VA	0.33	20-125	34-110°F (1.1-43.3°C)	3/4" (19.1 mm) NPT Male	3/4" (19.1 mm) NPT Male	1/2" (12.7 mm) ID Hose