## ICB TWIN SH PE, 200V SST W/WRLESS

Height: 32.8" Width: 21.9" Depth: 23.0" (83.3cm) (55.6cm) (58.4cm)





- Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease
- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- 4.3" Color Touchscreen aids in customizing recipes, brewing options and control
- The QWERTY key pad feature allows for easy customization of recipe names in English, Spanish and French
- SmartWAVE sprayhead technology provides enhanced uniformity of extraction and lime scale reduction
- ENERGY STAR® certified
- ICB Twin SH 53600.0100 is compatible with new Infusion SH servers and the new TF 1.5-gallon ThermoFresh® Servers
- Customers can easily add up to 10 screensaver images to advertise and promote their brand and products
- · Wireless Server monitoring
- · Fast flow hot water faucet
- · Stainless steel brew baskets provide durability and ease of cleaning
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete

Additional Features

Agency:

#### **Specifications**

Product #: 53600.0500 Funnel: Stainless Steel

Water Access: Plumbed Interface: Wireless Finish: Stainless/Grey

**Electrical & Capacity** 

			<u> </u>						
Volts*	Amps	Amps Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H <sup>2</sup> O Temp.	Phase	# Wires plus Ground	Hertz
200	27.7	5560	-	-	259	60°F (15.5°C)	1	2	50/60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

### Plumbing Requirements


PSI	kPa Fitting Supplied		Water Flow Required (GPM)		
20-90	138-621	3/8" Male Flare Fitting	1.00		

#### **CAD Drawings**

2D	Revit	KLC		

MARNING:



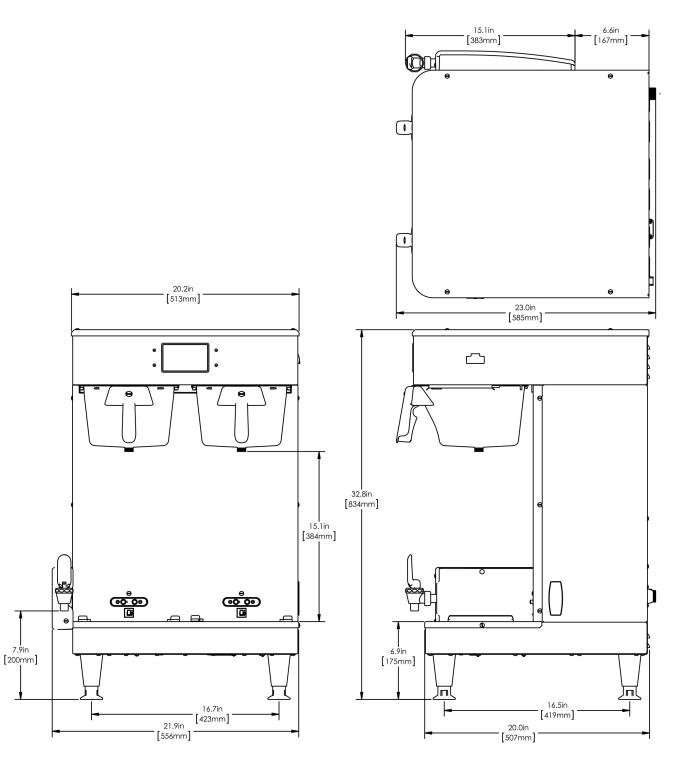

	Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	32.8 in.	21.9 in.	23.0 in.	37.5 in.	26.1 in.	28.4 in.	104.350 lbs	16.087 ft <sup>3</sup>	
Metric	83.3 cm	55.6 cm	58.4 cm	95.3 cm	66.4 cm	72.1 cm	47.333 kgs	0.456 m³	



# Related Products & Accessories: ICB TWIN SH PE, 200V SST W/WRLESS(53600.0500)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



1SH STAND, 120V INF SERIES

Product #: 27825.0200



2SH STAND, 120V INF SERIES

Product #: 27875.0200



KIT, DRIP TRAY INF TWIN SH

Product #: 53452.0000



KIT, DRIP TRAY SINGLE SH

Product #: 53452.0001



# Serving & Holding Options: ICB TWIN SH PE, 200V SST W/WRLESS(53600.0500)



