## DUAL TF DBC® SST

Height: 35.7" Width: 21.8" Depth: 23.8" (90.7cm) (60.5cm) (55.4cm)



Server(s) sold separately

**Specifications** 

Product #: 34600.0011 Water Access: Plumbed

Interface: Wireless Finish: Stainless

**Electrical & Capacity** 

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H²O Temp.	Phase	# Wires plus Ground	Hertz
220-240	27.0-29.5	6000-7100	No	-	283	60°F (15.5°C)	1	2	50-60
*When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.									

### Plumbing Requirements

#### CAD Drawings

					ge			
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC		
20-90	138-621	3/8" Male Flare Fitting	-	•				
^								

MARNING:



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle

Last Updated: 12/07/2023

- Brews 16.3 to 18.9gal (61.7 to 71.5L) of perfect coffee per hour
  - Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
  - · Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows® compatible).
  - · Easy pulse interface allows automatic programming of pulse routine
  - Preventive maintenance kit: 39641.0000
  - · SplashGard® funnel and optional funnel locks help improve safety
  - Stores individual coffee recipes so operator can easily brew many varieties
  - ThermoFresh® servers are vacuum insulated to keep coffee hot for hours.
  - · Energy saver mode reduces tank temperature during idle periods
  - · Operate any combination of BrewWISE equipment error-free with wireless brewergrinder interface through Smart Funnel with SplashGard®
  - · Servers not included unless otherwise noted

Agency:




Additional Features

BrewWISE

Faucet: Lower

Funnel: Smart Funnel

the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

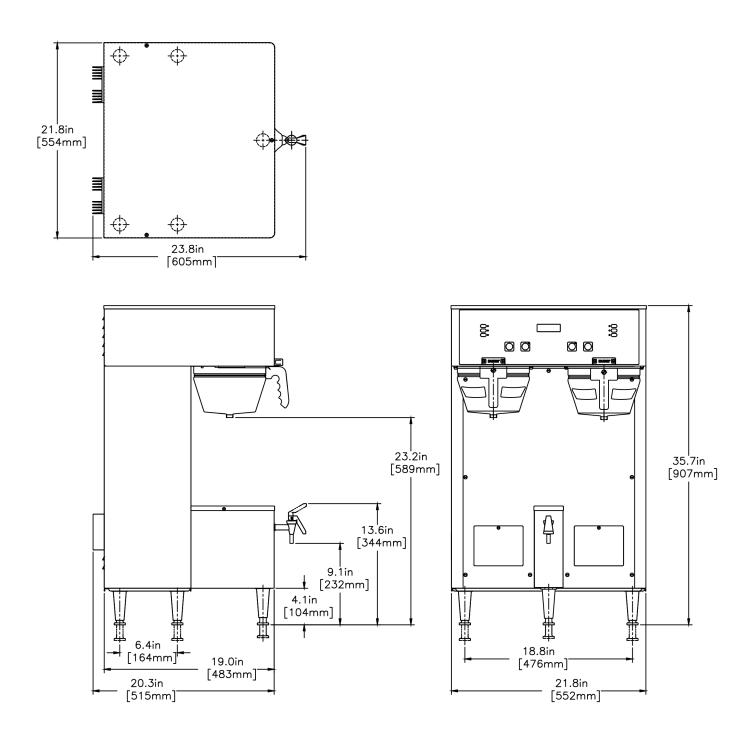

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.7 in.	21.8 in.	23.8 in.	38.8 in.	24.7 in.	25.9 in.	92.200 lbs	14.360 ft <sup>3</sup>	
Metric	90.7 cm	55.4 cm	60.5 cm	98.4 cm	62.7 cm	65.9 cm	41.822 kgs	0.407 m³	




 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 12/07/2023

 For most current specifications and other info visit bunn.com.
 12/07/2023

## Related Products & Accessories: DUAL TF DBC® SST(34600.0011)

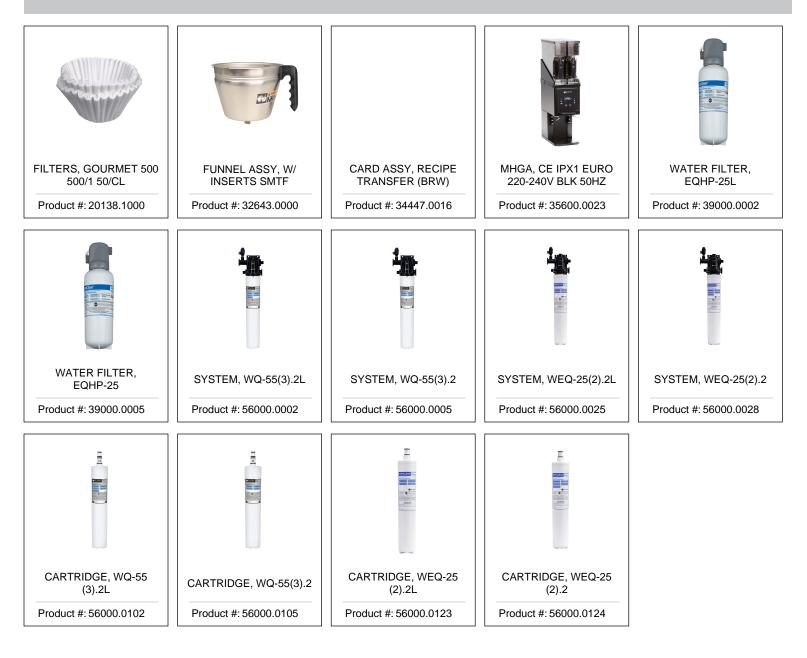



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last Updated:

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 12/07/2023

 For most current specifications and other info visit bunn.com.
 Last Updated:

# Serving & Holding Options: DUAL TF DBC® SST(34600.0011)



