



HOSHIZAKI

- > **IM-240NE**
- > **IM-240NE-21**
- > **IM-240NE-23**

daily ice production capacity of up to 240kg



Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.



> **IM-240NE**


CUBE ICE MAKER SERIES

FEATURES


- > smart computer board technology
- > slide-in air filter for easy cleaning
- > stainless steel exterior




UNIQUE ICE PRODUCTION SYSTEM

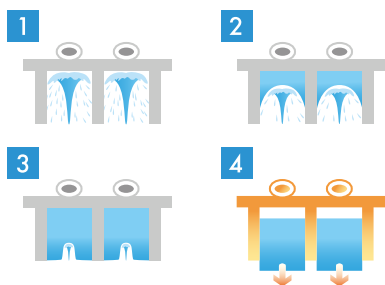


ICE SIZE



IM-240NE



IM-240NE-21




IM-240NE-23




DIMENSIONS & SPECIFICATION

CUBE ICE MAKER AIR SYSTEM

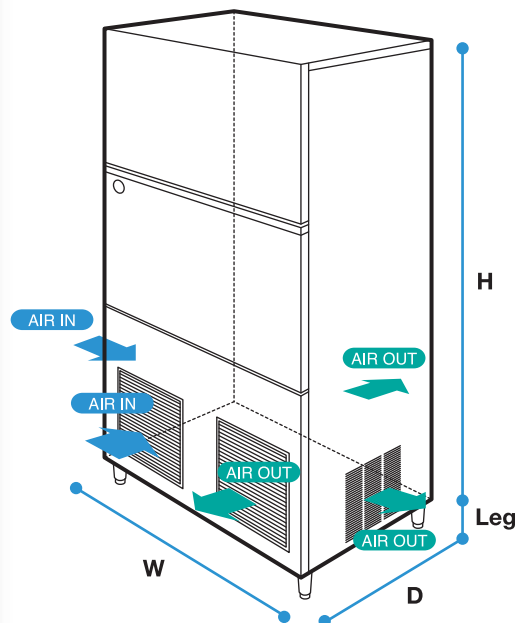

BACK SIDE

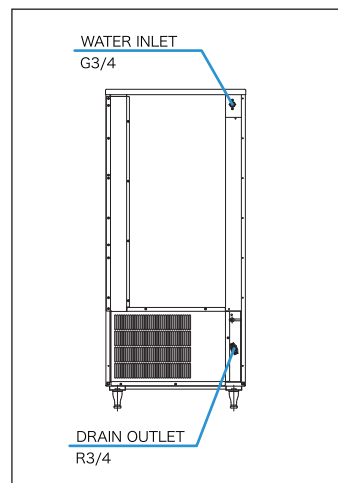

| MODEL NAME | | IM-240NE | IM-240NE-21 | IM-240NE-23 |
|---|-------------------|--|---------------------|---------------------|
| ICE DIMENSIONS (MM) | | 28 x 28 x 32 | 21 x 21 x 14 | 28 x 28 x 23 |
| DIMENSIONS (MM) | | Body : 704 x 665 x 1600 / Leg Height : 90-130 mm | | |
| PACKED DIMENSIONS (MM) | | 840 x 785 x 1695 | | |
| WEIGHT (NETT/GROSS) | | 111 KG / 122 KG | | |
| AMPERAGE / STARTING AMPERAGE | | 6.6A / 35A | | |
| ELECTRICAL CONSUMPTION | | 1320 W | | |
| REFRIGERANT CHARGE | | R404a | | |
| HEAT REJECTION (AT32°C/WT21°C) | | 2870 W (2470 kcal/h) | | |
| ICE PRODUCTION PER 24H (15MM) | (AT10°C/WT10°C) | 240 KG | 217 KG (7mm) | 225 KG |
| | (AT21°C/WT15°C) | 230 KG | 210 KG (7mm) | 215 KG |
| | (AT32°C/WT21°C) | 210 KG | 190 KG (7mm) | 195 KG |
| WATER CONSUMPTION PER 24H (AT21°C/WT15°C) | | 0.36 m ³ | 0.47 m ³ | 0.43 m ³ |
| | | 1.6L / 1KG ICE | 2.2L / 1KG ICE | 2L / 1KG ICE |
| ICE PRODUCTION (AT21°C/WT15°C) | FREEZE CYCLE TIME | 20 MIN | 15 MIN | 17 MIN |
| | PER CYCLE | 3.2 KG / 140 PCS | 2.1 KG / 360 PCS | 2.38 KG / 140 PCS |
| STORAGE CAPACITY | | 110 KG | | |

NOTE: All dimensions indicated are Width x Depth x Height in mm.
*60Hz units are available upon request

OPERATING CONDITIONS: • Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C
• Water Supply: 5°-35°C / 0.07-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz

• **WARRANTY:** Two years parts & labour for entire unit, 3rd year on compressor only. Excluding door & exterior damages