



# HOSHIZAKI

## UNDERCOUNTER REFRIGERATOR

### RT-128MA-S-ML RT-126MA-S-ML

A-FIT cabinets are designed to show outstanding performance and durability backed by Hoshizaki's many years of experience and high-quality standard. The cabinets combine ergonomic design with high functionality and strong cooling capacity to meet customer high expectations.



### KEY FEATURES







- > Pillar-less design for easy loading of large pans & trays
- > Enhanced cooling capacity with larger evaporator and stronger cooling fan
- > Cleaning-free condenser
- > Ergonomic full-height door
- > HACCP complied design
- > Forced evaporation system
- > Smart auto-defrost system
- > Field reversible door
- > Removable door gaskets

### CERTIFICATION



# DIMENSIONS & SPECIFICATION

## RT-128MA-S-ML

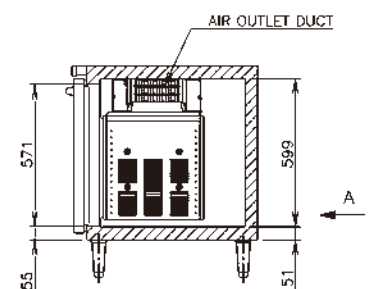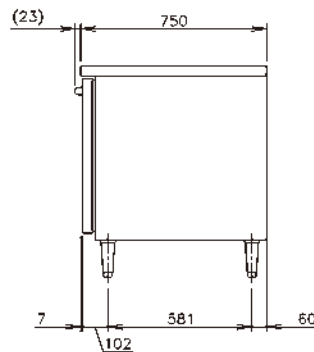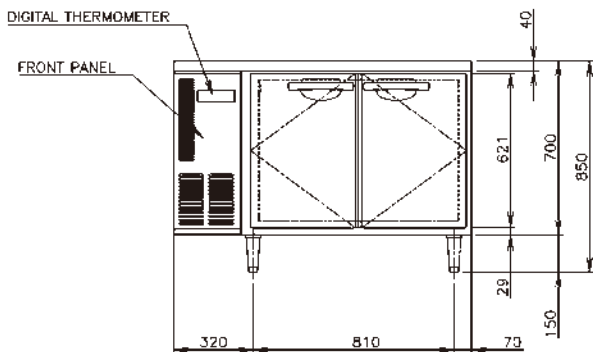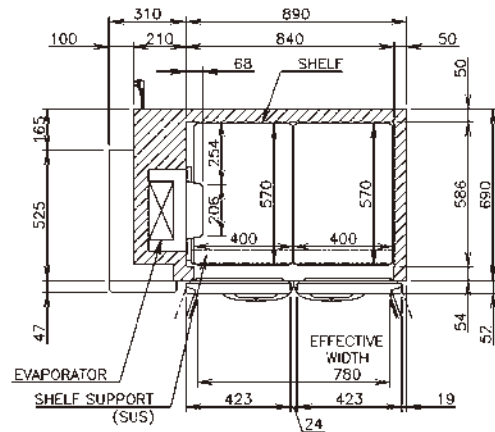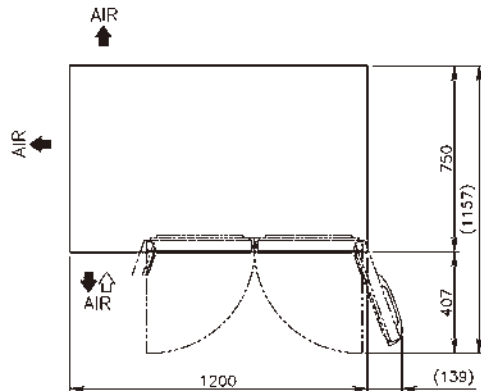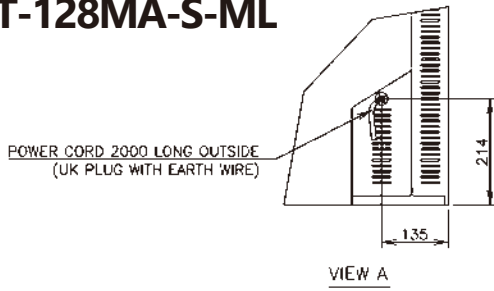

MODEL	RT-128MA-S-ML	RT-126MA-S-ML
TEMP. CONTROL	-6 to 12°C	-6 to 12°C
EFFECTIVE CAPACITY	307 L	231 L
WEIGHT	78 kg (Gross: Approx. 83kg)	71 kg (Gross: Approx. 76kg)
OUTSIDE DIMENSIONS W x D x H (mm)	1200 x 750 x 850(-880)	1200 x 600 x 850(-880)
PACKAGE W x D x H (mm)	1265 x 830 x 790	1265 x 680 x 790
POWER SUPPLY	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)	1 Phase 230V 50Hz Capacity: 0.5kVA (2.5A)
ELECTRIC CONSUMPTION	240W Heater: 187W Refrigeration 245W Defrost: 165W	240W Heater: 192W Refrigeration 245W Defrost: 165W
AMPERAGE	Rated 2.0A	Rated 2.0A
SHELF	4pcs.	4pcs.
OPERATING CONDITION	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage ±6%	Ambient Temperature: 5-38°C Voltage Range: Rated Voltage ±6%

We reserve the right to make changes in specification and design without prior notice. [WWW.HOSHIZAKI.COM](http://WWW.HOSHIZAKI.COM)



# HOSHIZAKI

18 Boon Lay Way #01-102 Tradehub 21, 609966  
TEL 6225 2612 FAX 6225 3219 [www.hoshizaki.com.sg](http://www.hoshizaki.com.sg)