



HOSHIZAKI

UPRIGHT REFRIGERATOR

HF-78MA-S HF-76MA-S

A-FIT cabinets are designed to show outstanding performance and durability backed by Hoshizaki's many years of experience. The new cabinets combine ergonomic design with high functionality and strong cooling capacity to meet customer high expectations.



KEY FEATURES


- > Enhanced cooling capacity with larger evaporator and stronger cooling fan
- > Cleaning-free condenser
- > Ergonomic full-height door
- > HACCP complied design
- > Forced evaporation system
- > Smart auto-defrost system
- > Field reversible door
- > LED interior lighting
- > Removable door gaskets

CERTIFICATION



DIMENSIONS & SPECIFICATION


HF-78MA-S

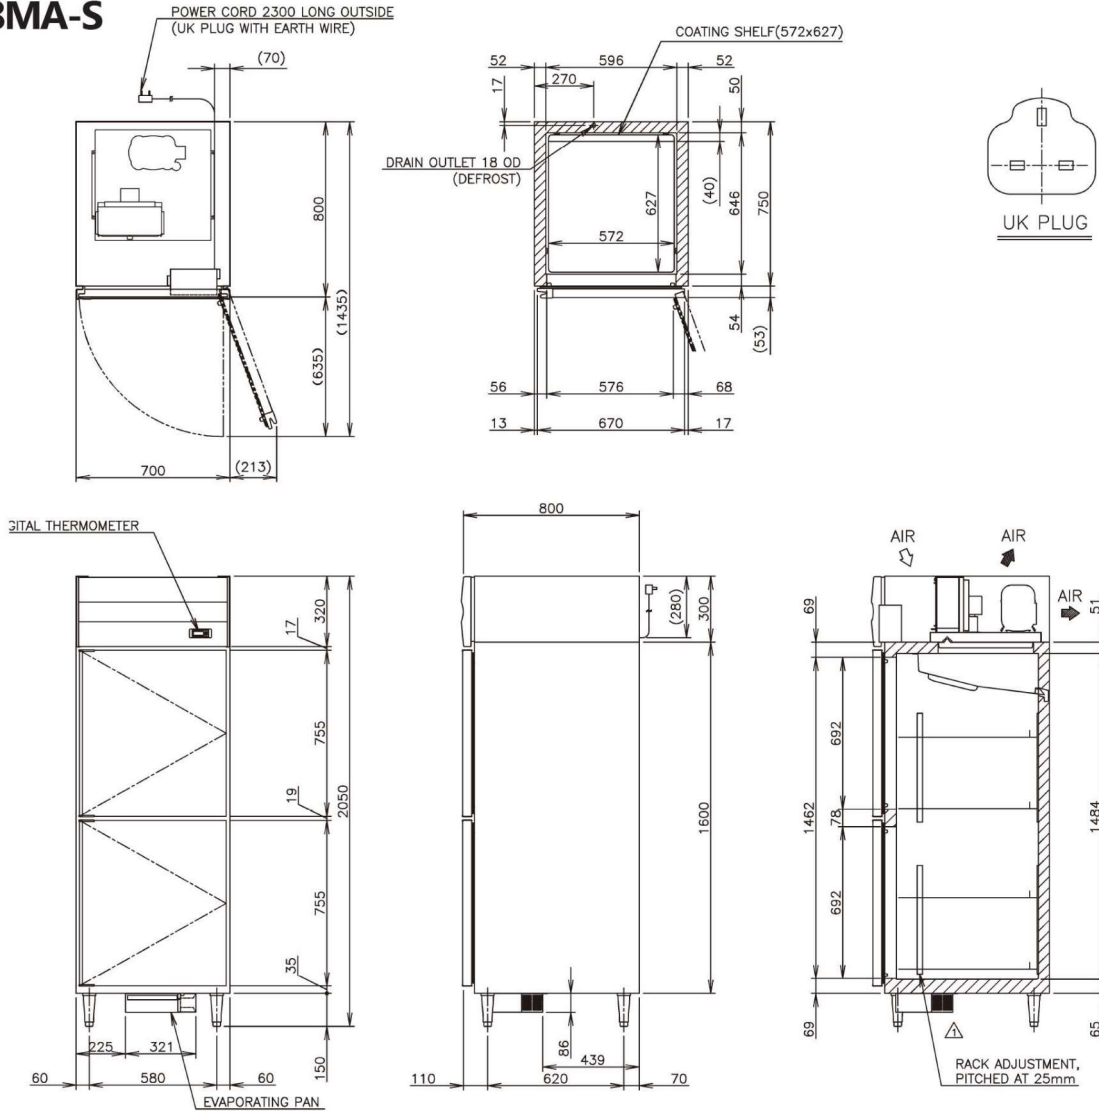

MODEL	HF-78MA-S	HF-76MA-S
TEMP. CONTROL	-23 to -7°C	-23 to -7°C
EFFECTIVE CAPACITY	569 L	467 L
WEIGHT	104 kg (Gross 126kg)	106 kg (Gross 128kg)
OUTSIDE DIMENSIONS W x D x H (mm)	700 x 800 x 2050 (-2080)	700 x 650 x 2050 (-2080)
PACKAGE W x D x H (mm)	760 x 900 x 2075	760 x 750 x 2075
POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 0.56kVA (2.53A)	1 Phase 220 - 240V 50Hz Capacity: 0.65kVA (3.0A)
ELECTRIC CONSUMPTION	469 W Heater: 426W Defrost: 426W	419 W Heater: 426W Defrost: 426W
AMPERAGE	Rated: 4.1A Starting: 8.5A	Rated: 3.3A Starting: 10.7A
SHELF	4 pcs.	4 pcs.
OPERATING CONDITION	Ambient Temperature: 5 - 43°C Voltage Range: Rated Voltage ±6%	Ambient Temperature: 5 - 43°C Voltage Range: Rated Voltage ±6%

DIMENSIONS & SPECIFICATION

HF-78MA-S

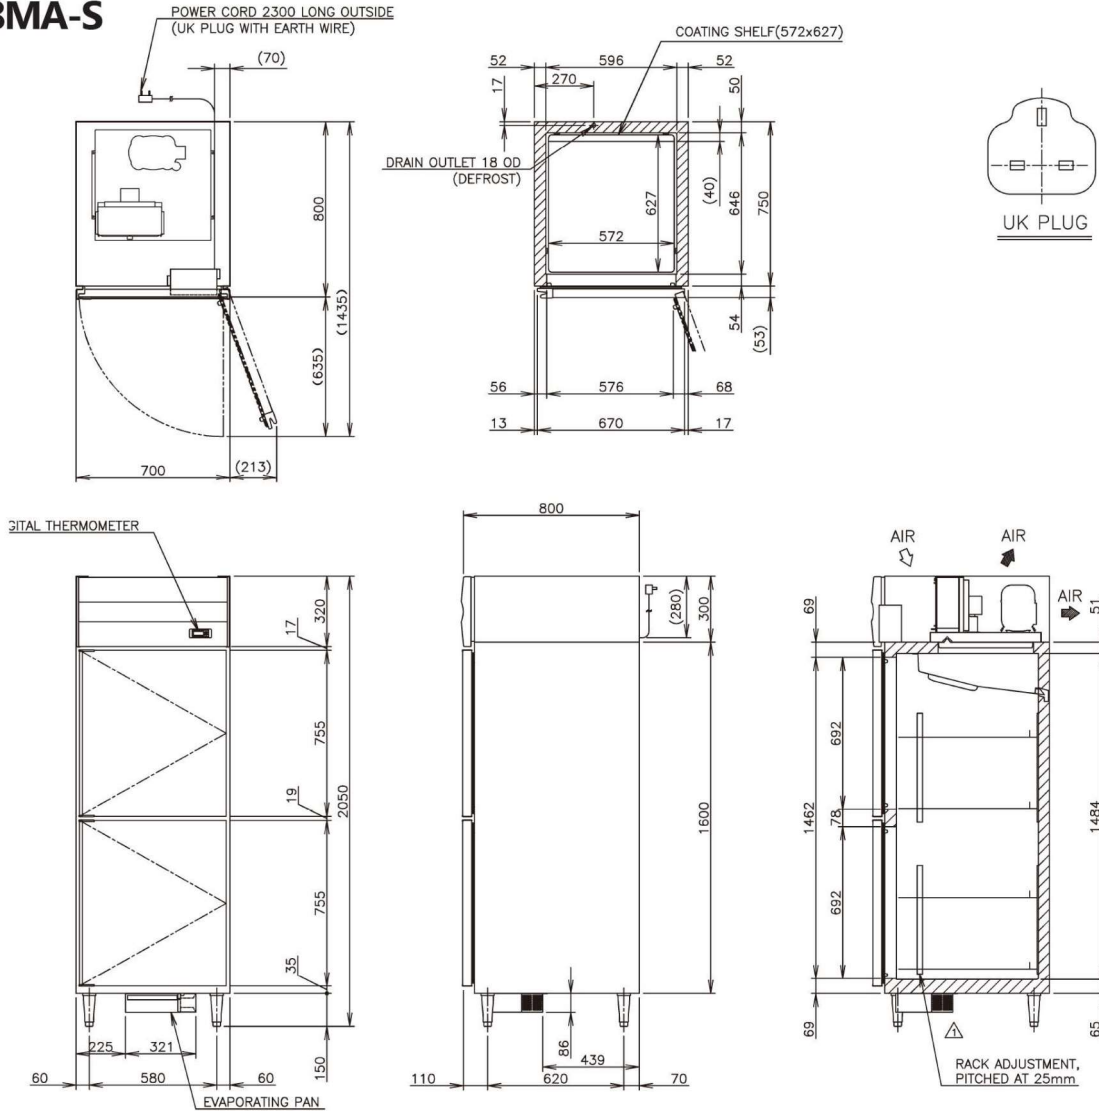

MODEL	HF-78MA-S	HF-76MA-S
TEMP. CONTROL	-23 to -7°C	-23 to -7°C
EFFECTIVE CAPACITY	569 L	467 L
WEIGHT	104 kg (Gross 126kg)	106 kg (Gross 128kg)
OUTSIDE DIMENSIONS W x D x H (mm)	700 x 800 x 2050 (-2080)	700 x 650 x 2050 (-2080)
PACKAGE W x D x H (mm)	760 x 900 x 2075	760 x 750 x 2075
POWER SUPPLY	1 Phase 220 - 240V 50Hz Capacity: 0.56kVA (2.53A)	1 Phase 220 - 240V 50Hz Capacity: 0.65kVA (3.0A)
ELECTRIC CONSUMPTION	469 W Heater: 426W Defrost: 426W	419 W Heater: 426W Defrost: 426W
AMPERAGE	Rated: 4.1A Starting: 8.5A	Rated: 3.3A Starting: 10.7A
SHELF	4 pcs.	4 pcs.
OPERATING CONDITION	Ambient Temperature: 5 - 43°C Voltage Range: Rated Voltage ±6%	Ambient Temperature: 5 - 43°C Voltage Range: Rated Voltage ±6%