

|                       |               |                           |     |
|-----------------------|---------------|---------------------------|-----|
| <b>LINEA LINE</b>     | PLUG-IN       | SECURE FOOD CONTROL - SFC | 4.0 |
| <b>TIPOLOGIA TYPE</b> |               |                           |     |
| <b>MODELLO MODEL</b>  | <b>100 Kg</b> |                           |     |

**CARATTERISTICHE GENERALI**  
**GENERAL FEATURES**

| VERSIONE VERSION    | STANDARD   | STANDARD COOKING | TOTAL VIEW | TOTAL VIEW COOKING  | 4 VETRI   | 4 VETRI COOKING |
|---------------------|--|------------------|------------|---|-----------|-----------------|
| <b>CODICE CODE</b>  | PES1004.0  | PES1004.0 COTT   | PES100V40  | PES100V40 COTT  | PES1004V4 | PES1004V4 COTT  |
| <b>COLORE COLOR</b> | ACCIAIO INOX AISI 304<br>STAINLESS STEEL AISI 304                                |                  |            | LAMIERA PLASTIFICATA –<br><b>ROSSO</b><br>PLASTICIZED IRON SHEET – <b>RED</b>       |           |                 |
|                     | LAMIERA PLASTIFICATA – <b>NERA</b><br>PLASTICIZED IRON SHEET – <b>BLACK</b>      |                  |            | LAMIERA PLASTIFICATA –<br><b>CELESTE</b><br>PLASTICIZED IRON SHEET –<br><b>BLUE</b> |           |                 |
|                     | VERNICIATO CON <b>RAL</b> (SU RICHIESTA)<br>PAINTED WITH <b>RAL</b> (ON REQUEST) |                  |            |   |           |                 |

| CONDIZIONI GENERALI E BUONE PRATICHE   | GENERAL CONDITIONS AND BEST PRACTICES  |
|--|--|
| <ul style="list-style-type: none"> <li>• Non usare prodotti per l'igiene a base di cloro, sali di ammonio quaternario e derivati.</li> <li>• Garantire uno spazio di 40 - 50 cm sopra l'unità condensatrice.</li> <li>• Garantire la corretta sostituzione del filtro addolcitore come indicato nel <i>Manuale d'uso</i>.</li> <li>• Predisposizione per carico acqua diretto da rete. Fornito con tanica da 5L.</li> <li>• Predisposizione per scarico diretto. Fornito con vaschetta raccogli condensa.</li> </ul> | <ul style="list-style-type: none"> <li>• Do not use hygiene products based on chlorine, quaternary ammonium salts and derivatives.</li> <li>• Ensure a space of 40 - 50 cm above the refrigeration unit.</li> <li>• Ensure the correct replacement of the softener filter as indicated in the User Manual.</li> <li>• Predisposition for direct water supply from the mains. Supplied with 5L tank.</li> <li>• Predisposition for direct discharge. Supplied with condensate drain pan.</li> </ul> |


## RENDERING

| VERSIONE<br>VERSION | STANDARD   | STANDARD COOKING   |
|---------------------|------------|--------------------|
| CODICE<br>CODE      | PES1004.0  | PES1004.0 COTT     |
|                     |            |                    |
| VERSIONE<br>VERSION | TOTAL VIEW | TOTAL VIEW COOKING |
| CODICE<br>CODE      | PES100V40  | PES100V40 COTT     |
|                     |            |                    |
| VERSIONE<br>VERSION | 4 VETRI    | 4 VETRI COOKING    |
| CODICE<br>CODE      | PES1004V4  | PES1004V4 COTT     |
|                     |            |                    |

**CARATTERISTICHE STRUTTURALI**  
**STRUCTURAL FEATURES**

| VERSIONE<br>VERSION | STANDARD  | STANDARD COOKING |
|---------------------|-----------|------------------|
| CODICE<br>CODE      | PES1004.0 | PES1004.0 COTT   |

| VERSIONE<br>VERSION | TOTAL VIEW | TOTAL VIEW COOKING |
|---------------------|------------|--------------------|
| CODICE<br>CODE      | PES100V40  | PES100V40 COTT     |

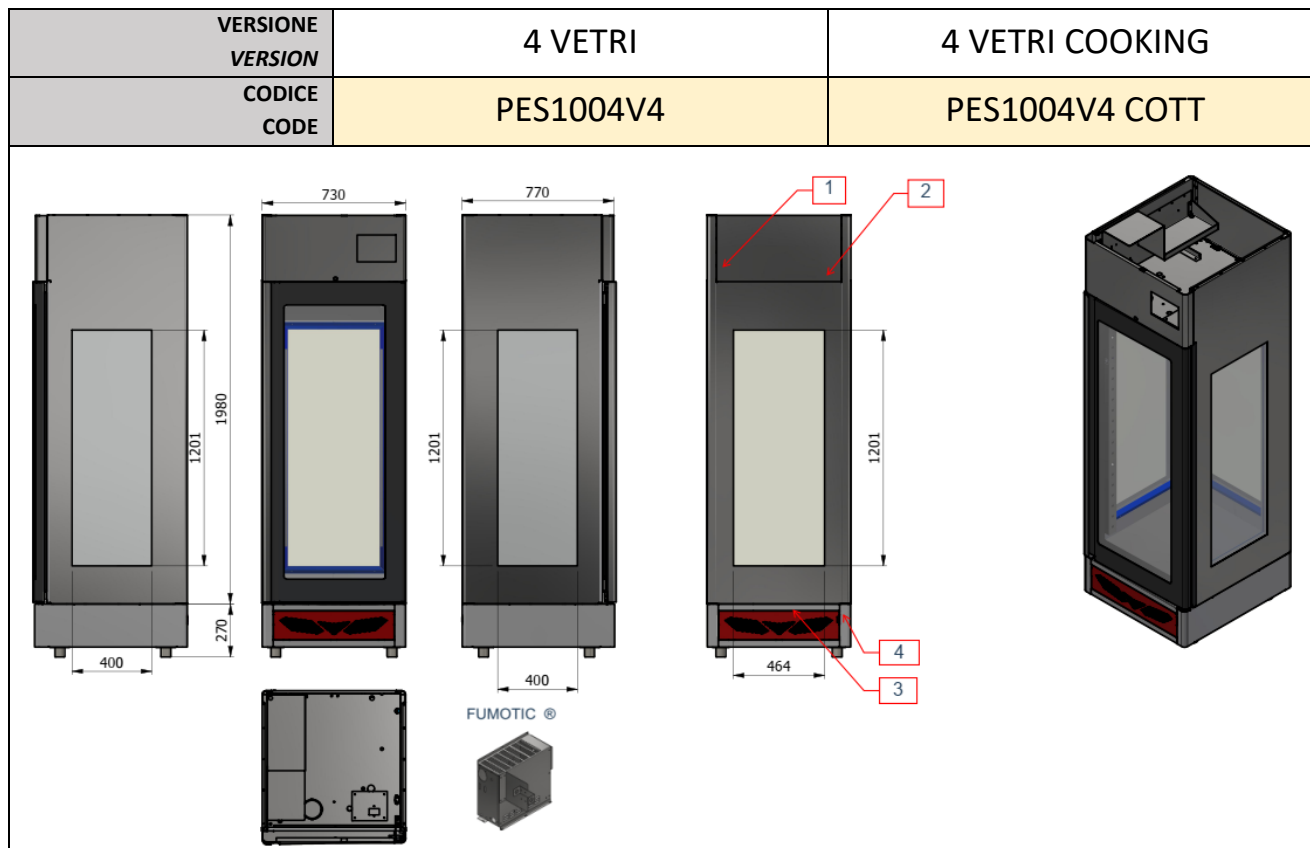

| # | DESCRIZIONE / DESCRIPTION                               | SPECIFICA / FEATURES                             |
|---|---|--|
| 1 | Ingresso acqua diretto/ Direct Water inlet              | Ø3/4"  |
| 2 | Connessione elettrica / Electrical connection           | 220 – 240 V/1/ 50Hz ; 220 – 240 V/1/ 60Hz        |
| 3 | Scarico acqua diretto/ Direct Water outlet              | Ø 1/2"   |
| 4 | Rialzo / Skirting board with feet                       | 220 (H) + 50 (H) mm / 22 Kg                      |
|   | Configurazioni alternative / Configuration Alternatives |  |
|   | Piedini – feet  | 4 pz – 150 (H) mm                                |
|   | Kit route – wheels                                      | 2 pz + 2 pz con freno / with brakes – 150 (H) mm |

| PESO TOTALE SENZA IMBALLO<br>TOTAL WEIGHT WITHOUT PACKAGING |        | KIT TIPOLOGICO<br>TYPOLOGICAL KIT |        |
|---|--------|-----------------------------------|--------|
| STANDARD  | 210 Kg | KIT GUIDE                         | 7 PZ + |
| STANDARD COOKING  |        | STAINLESS STEEL GUIDE SETS        | 7 PZ   |
| TOTAL VIEW  | 225 Kg | GRIGLIA                           | 7 PZ   |
| TOTAL VIEW COOKING  |        | STAINLESS STEEL GRILLS            |        |
| 4 VETRI   | 248 Kg |                                   |        |
| 4 VETRI COOKING   |        |                                   |        |

**CARATTERISTICHE IMPIANTI  
SYSTEMS FEATURES**

| VERSIONE<br>VERSION | STANDARD  | STANDARD<br>COOKING | TOTAL VIEW | TOTAL VIEW<br>COOKING | 4 VETRI   | 4 VETRI<br>COOKING |
|---------------------|-----------|---------------------|------------|-----------------------|-----------|--------------------|
| CODICE<br>CODE      | PES1004.0 | PES1004.0<br>COTT   | PES100V40  | PES100V40<br>COTT     | PES1004V4 | PES1004V4<br>COTT  |

|  |   |
|--|---|
| ASSORBIMENTO MAX<br>MAX POWER  | <b>1930 W - 8,8 A</b>   |
| ASSORBIMENTO NOMINALE<br>RATED CURRENT                                     | <b>748 W – 3,4 A</b>  |
| ILLUMINAZIONE<br>LIGHTING  | <b>44 W - 0,2 A</b>   |
| TIPO REFRIGERANTE<br>REFRIGERANT TYPE                                      | <b>R452A</b>  |
| TENSIONE – FREQUENZA – QUANTITA' GAS<br>TENSION – FREQUENCY – GAS QUANTITY | <b>220 – 240 V/1/50Hz, 330g<br/>220 – 240 V/1/60Hz, 330 g</b> |
| CLASSE CLIMATICA<br>CLIMATE CLASS  | <b>SN</b>   |
| RLA (rated load amps)  | <b>19,5 A</b>   |

| CONDIZIONI CLIMATICHE<br>CLIMATE CONDITIONS        |            | GAS COMPATIBILI (NON INCLUSO)<br>GAS COMPATIBILITY (NOT PROVIDED)  |
|--|------------|--|
| TEMPERATURA DI ESERCIZIO<br>OPERATING TEMPERATURES | 10 ÷ 32 °C | <ul style="list-style-type: none"> <li>• R404A – 220-240V/1/50-60Hz</li> <li>• R449A – 220-240V/1/50-60Hz</li> </ul> |
| UMIDITA' RELATIVA AMBIENTE<br>RELATIVE HUMIDITY    | < 90% RH   |  |

**L'installazione finale viene eseguita solo da professionisti autorizzati dall'azienda produttrice.  
Final installation must to be performed by technicians authorized from manufacturing company.**