
ICBA Platinum Edition, CE 220-240V UK

Height: 26.8" Width: 10.2" Depth: 22.1" (68.1cm) (25.9cm) (56.1cm)





- Produce fresh cold brew in minutes with the new Cold Brew mode, enabling operators to brew an on-demand batch of concentrate or ready-to-drink cold brew quickly and consistently with operational ease
- Add Bubble Tea to the menu with the new Bubble Tea Kit (54165.1018)
- 4.3" Color Touchscreen aides in customizing recipes, brewing options and control
- The Infusion Series® Platinum Edition relies on the powerful duo of the Peak Extraction Sprayhead and SmartWAVE® technology to further enhance the uniformity of extraction and resistance to limescale buildup.
- USB programming for uploading and downloading recipes and software updates, all in less than a minute
- Brews into 2.5 to 3.8L (84 to 128 oz) airpots and 3.8 to 5.7L (1 to 1.5 gallon) baseless Thermofresh servers
- BUNN Infusion Series technology allows for multiple recipes from one footprint
- Energy-saver mode reduces tank temperature during idle periods
- Electronic funnel lock prevents removal of the brew funnel until drip-through is complete
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing
- Hot water faucet (supplied for custom installation)

Agency:

Faucet: Variable



Additional Features

Funnel Locks

Specifications

Product #: 53300.0501

Water Access: Plumbed

Finish: Stainless

Funnel: Stainless Steel

Electrical & Capacity

Volts*	Amps	Amps Watts	Cord Attached	Plug Type	g Type 8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
220-240	11.0-12.0	2400-2900	Yes	UK 13A	141	60°F (15.5°C)	1	2	50-60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	3/8" Male Flare Fitting	1.00				


CAD Drawings

ĺ			
	2D	Revit	KLC

MARNING:



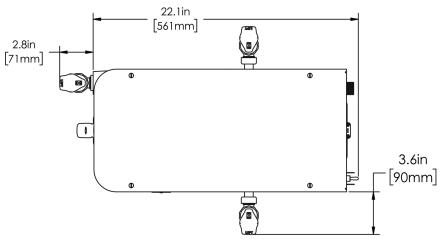

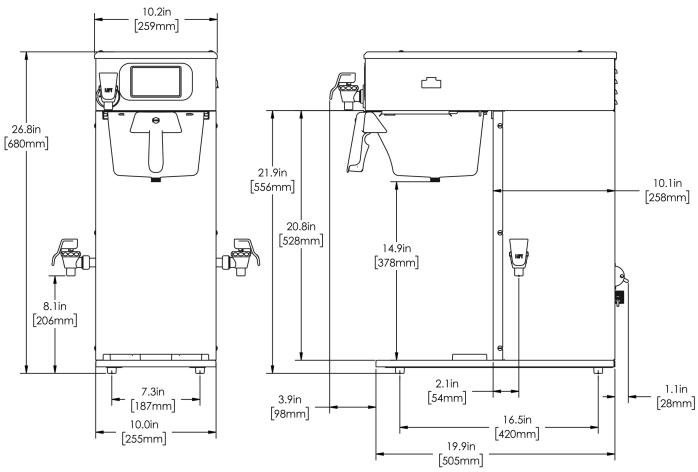

	Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	26.8 in.	10.2 in.	22.1 in.	34.9 in.	13.3 in.	27.4 in.	53.710 lbs	7.321 ft³	
Metric	68.1 cm	25.9 cm	56.1 cm	88.6 cm	33.7 cm	69.5 cm	24.363 kgs	0.207 m³	




Related Products & Accessories: ICBA Platinum Edition, CE 220-240V UK(53300.0501)

























Serving & Holding Options: ICBA Platinum Edition, CE 220-240V UK(53300.0501)



AIRPOT, 2.5L GL PB 6/ CASE

Product #:13041.0101



AIRPOT, 2.5L SST LA SINGLE PK

Product #:32125.0000



AIRPOT, 2.5L SST LA 6/ CASE

Product #:32125.0100



AIRPOT, 3.0L SST LA SINGLE PK

Product #:32130.0000



AIRPOT, 3.0L SST LA 6/ CASE

Product #:32130.0100



AIRPOT, 3.8L SST LA SINGLE PK

Product #:36725.0000



AIRPOT, 3.8L SST LA 6/ CASE

Product #:36725.0100



STAND ASSY, TF SERVER

Product #:39795.0003



TF SERVER, DSG2 1G SST NOBASE

Product #:42700.0050



TF SERVER, DSG2 1G BLK NOBASE

Product #:42700.0051



TF SERVER,DSG2 1.5G SST NOBAS

Product #:42750.0050



TF SERVER, 1G/3.8L MECH NOBASE

Product #:44000.0050



TF SERVER, 1G/3.8L MECH BLK NOBASE

Product #:44000.0051



TF SERVER, 1G MECH GEN3 NOBASE

Product #:44000.0250

STAND ASSY, TF SERVER

Product #:54473.0000



STAND ASSY KIT, TF SERVER

Product #:54473.1000

